



Europäisches
Patentamt

European
Patent Office

Office eur péen
des brevets

RECEIVED
APR 07 2003
GROUP 1700

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

RECEIVED
APR 11 2003
TECH CENTER 1600/2900

Patentanmeldung Nr. Patent application No. Demande de brevet n°

00870158.3

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

DEN HAAG, DEN
THE HAGUE, 11/02/03
LA HAYE, LE

100-100000

RECEIVED 100000

OFFICE

THIS PAGE BLANK (USPTO)



Eur päisches
Pat ntamt

Eur pean
Patent Offic

Office européen
des brevets

Anmeldung Nr:
Application no.: 00870158.3
Demande no:

Anmeldetag:
Date of filing: 10.07.00
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

The Procter & Gamble Company
One Procter & Gamble Plaza
Cincinnati,
Ohio 45202
ETATS-UNIS D'AMERIQUE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se referer à la description.)

Retardation of discolouration of dicarboxylic acids

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

/00.00.00/

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

C07C51/00

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU MC NL PT SE

11/18/2011 11:11:11 AM

THIS PAGE BLANK (USPTO)

The following information is provided for your information only. It is not intended to be used for any other purpose.

Page 1 of 1

The following information is provided for your information only. It is not intended to be used for any other purpose.

The following information is provided for your information only. It is not intended to be used for any other purpose.

5

RETARDATION OF DISCOLOURATION OF DICARBOXYLIC ACIDS

10

Paul Irma Albertus VAN DIJCK

Technical Field

15

The present invention relates to the retardation of the discolouration of dicarboxylic acids and, in particular, the retardation of the discolouration of molten dicarboxylic acids.

20

Background of the Invention

Dicarboxylic acids are used in a variety of ways and are especially valued in the polymer industry where they are used in the production of various polymers including polyamides and polyurethanes. More recently dicarboxylic acids have
25 been found to be useful in the coating of laundry and dishwashing tablets (see, for example, EP-A-846,754).

Many of the uses of dicarboxylic acids require that they be molten during at least part of the process. For example, when hexamethylenediamine is
30 polymerised with hexandioic acid to produce nylon, the polymerisation reaction is usually carried out at by mixing together molten hexamethylenediamine and molten hexandioic acid in stoichiometric amounts. There are many documents discussing this type of process including US-A-4,131,712, WO-A-96/16107 and EP-A-765,855. Also, as described in EP-A-846,754, the process
35 for coating laundry and dishwashing tablets is preferably carried out using molten dicarboxylic acid.

However, the use of molten dicarboxylic acid can be problematic because molten dicarboxylic acids have a tendency to discolour. This discolouration can be undesirable for many applications. For example, it is desirable to consumers that laundry tablets have a high degree of whiteness. When coated with a discoloured dicarboxylic acid coating such tablets appear dirty to the consumer and, therefore, not suitable for laundry purposes.

Various attempts have been made to solve this problem. For example, US-A-4,442,260 describes a process for making a highly concentrated solution of nylon salt which, through controlling water content and reaction temperatures, claims to reduce the rate of the undesirable side reactions that form the coloured by-products. WO-A-99/61510 describes an improved polyamidation system for producing a polyamide from molten dicarboxylic acid monomer and molten diamine monomer. In the system of WO-A-99/61510 oxygen is removed from the solid dicarboxylic acid by use of a vacuum pump and nitrogen displacement. Ultrasonic vibration under a nitrogen atmosphere is then applied to the molten dicarboxylic acid to eliminate further oxygen. This is said to allow the acid to melt without thermal degradation or discolouration.

However, the prior art solutions can be complex, expensive and are not always suitable or successful. Therefore, there exists a need for a simple, effective way of retarding the discolouration of dicarboxylic acids.

The Applicant has surprisingly found that the discolouration of dicarboxylic acids can be retarded by adding water to the molten system.

Summary of the Invention

According to the present invention there is provided a process for retarding the discolouration of dicarboxylic acids, said process comprising:

- (a) heating said dicarboxylic acid to a temperature above its melting point;
- (b) adding water to said dicarboxylic acid.

A further aspect of the present invention further provides a composition for retarding the discolouration of dicarboxylic acids, said composition comprising 1g, preferably 2.5g, more preferably 5g, of water per 1,000g of dicarboxylic acid. A further aspect of the present invention provides for the use of water to

retard the discolouration of dicarboxylic acids, particularly molten dicarboxylic acids.

Unless otherwise indicated, all ingredients expressed herein are on a weight
5 percentage of the active ingredient.

Brief Description of the Drawings

Figure 1 shows a process according to the present invention for coating tablets
10 in which the water is added in liquid form to a molten bath of dicarboxylic acid.

Figure 2 shows a process according to the present invention for coating tablets
in which the water is added via a steam pipe to a molten bath of dicarboxylic
acid.

15 Figure 3 shows the results, in terms of discolouration as measured by the
Hunter-b value, of tablets coated according to the process of Example 1 and
Comparative Example 1.

20 Figure 4 shows the results, in terms of discolouration as measured by the
Hunter-b value, of tablets coated according to the process of Example 2 and
Comparative Example 2.

Detailed Description of the Invention

25 According to the present invention there is provided a process for retarding the
discolouration of dicarboxylic acids, said process comprising heating said
dicarboxylic acid to a temperature above its melting point and adding water to
said dicarboxylic acid. The present process will be described in more detail
below.

30 A further aspect of the present invention provides a composition for retarding
the discolouration of dicarboxylic acids, said composition comprising at least
1g, preferably at least 2.5g, more preferably at least 5g, of water per 1,000g of
dicarboxylic acid.

35 A further aspect of the present invention provides for the use of water to retard
the discolouration of dicarboxylic acids, particularly molten dicarboxylic acids.

The present use can be with water in any state. However, for practical reasons it is preferred that liquid or gaseous water is used since the addition of ice to the dicarboxylic acid could cause localised solidification of molten dicarboxylic acid.

Process

The present process comprises the steps:

- (a) heating a dicarboxylic acid to a temperature above its melting point;
- (b) adding water to said dicarboxylic acid.

Preferably the dicarboxylic acid is heated to a temperature at least 5°C above its melting point, more preferably at least 10°C above its melting point.

Therefore, a preferred process comprises the steps:

- (a) heating a dicarboxylic acid to a temperature at least 5°C, preferably at least 10°C, above its melting point;
- (b) adding water to said dicarboxylic acid.

The water may be added to the dicarboxylic acid at any time but is preferably added after the dicarboxylic acid is molten. Preferably the water is added within 10 minutes, more preferably within 5 minutes, even more preferably within 2 minutes of the dicarboxylic acid becoming molten. Therefore, a preferred process comprises the steps:

- (a) heating a dicarboxylic acid to a temperature above its melting point;
- (b) adding water to the molten dicarboxylic acid within 10 minutes, preferably within 5 minutes, more preferably within 2 minutes of the dicarboxylic acid becoming molten.

The water may be added in any manner. However, the water is preferably added as liquid or as steam. The water may be added in a single portion, in aliquots or as a continuous stream. For practical purposes the water is preferably added as a continuous stream.

A surprising aspect of the present invention is that a proportionally small amount of water can be effective at retarding the discolouration of a much larger amount of dicarboxylic acid. In the present process the water is preferably added in an amount of at least 1g per 1,000g of dicarboxylic acid. More preferably the water is added in an amount of at least 2.5g per 1,000g of

dicarboxylic acid. Even more preferably the water is added in an amount of at least 5g per 1,000g of dicarboxylic acid.

The processes according to the present invention are often carried out at a temperature above the boiling point of water. Therefore, the water added in the present process evaporates. If evaporation of the water occurs, it is necessary to add more water to continue to retard the discolouration of the dicarboxylic acid. Therefore, it is preferred that at least 1g of water per 1,000g of dicarboxylic acid is added per minute. More preferably at least 2.5g of water per 1,000g of dicarboxylic acid is added per minute. Even more preferably at least 5g of water per 1,000g of dicarboxylic acid is added per minute.

Therefore, the preferred process of the present invention comprises the step:

- (a) heating a dicarboxylic acid to a temperature at least 5°C, preferably at least 10°C, above its melting point;
- (b) adding water to the molten dicarboxylic acid within 10 minutes, preferably within 5 minutes, more preferably within 2 minutes of the dicarboxylic acid becoming molten.

wherein at least 1g, preferably at least 2.5g, more preferably at least 5g, of water per 1,000g of dicarboxylic acid is added per minute.

Preferably the dicarboxylic acid for the present process is selected from C_2 - C_{13} dicarboxylic acids and mixtures thereof, more preferably C_6 - C_{12} dicarboxylic acids and mixtures thereof. Preferred for use herein are hexanedioic acid, octanedioic acid, decanedioic acid, dodecanedioic acid and mixture thereof. More preferred for use herein is hexanedioic acid.

In the present process, water may be added to the dicarboxylic acid in any state but, for practical reasons, it is preferably added as a liquid or as a gas, more preferably as a liquid. The water preferably has a temperature of at least 10°C, more preferably at least 20°C, even more preferably at least 50°C before it is added to the dicarboxylic acid.

Composition

The compositions of the present invention comprise molten dicarboxylic acid and water. They may comprise other, optional ingredients. However, if present, the compositions herein preferably comprise less than 10%, more preferably

less than 5%, by weight, of optional ingredients. The present compositions comprise at least 1g of water per 1,000g of dicarboxylic acid. More preferably the present compositions comprise at least 2.5g of water per 1,000g of dicarboxylic acid. Even more preferably the present compositions comprise at least 5g of water per 1,000g of dicarboxylic acid.

Dicarboxylic Acids

Any dicarboxylic acid or mixture of dicarboxylic acids may be used herein. However, preferably the dicarboxylic acid is selected from C₂-C₁₃ dicarboxylic acids and mixtures thereof, more preferably C₆-C₁₂ dicarboxylic acids and mixtures thereof. Preferred for use herein are hexanedioic acid, decanedioic acid, octanedioic acid, dodecanedioic acid and mixture thereof. More preferred for use herein is hexanedioic acid. Preferably the dicarboxylic acids for use herein have a melting point of from 80°C to 200°C, more preferably from 90°C to 180°C, even more preferably from 95°C to 160°C.

Water

Water is the preferred solvent for use herein. Water may be added to the dicarboxylic acid in any state but, for practical reasons, it is preferably added as a liquid or as a gas, more preferably as a liquid. The water preferably has a temperature of at least 10°C, more preferably at least 20°C, even more preferably at least 50°C before it is added to the dicarboxylic acid.

Preferred Embodiments

A preferred embodiment of the present invention is shown in Figure 1. In Figure 1, dicarboxylic acid is added to container (4) and then heated with mixing until molten. Water is added to the molten dicarboxylic acid (1) through an inlet pipe (6) at a rate of 30g/min. The molten mixture is then pumped through a pipe (2) to a shower head (3). The shower head is positioned over a conveyer belt (7) carrying detergent tablets (5). The molten dicarboxylic acid is then sprayed over the tablets. The tablets are thus coated with a dicarboxylic acid coating. The excess coating is blown off and the tablets are transported to the outside of the box.

Another preferred embodiment of the present invention is shown in Figure 2. In Figure 2, dicarboxylic acid is added to container (14) and then heated with mixing until molten. Steam is added to the molten dicarboxylic acid (11)

through an inlet pipe (16) at a rate of 50g/min. Apertures (18) are spaced along the length of inlet pipe (16) to allow the steam to escape into the molten mixture. The molten mixture is then pumped through a pipe (12) to a shower head (13). The shower head is positioned over a conveyer belt (17) carrying detergent tablets (15). The molten dicarboxylic acid is then sprayed over the tablets. The tablets are thus coated with a dicarboxylic acid coating. The excess coating is blown off and the tablets are transported to the outside of the box.

10 **Optional Ingredients**

The compositions herein can comprise other optional ingredients. A variety of optional ingredients may be useful. These include chelants such as aminophosphonates and other phosphonates, hydroxycarboxylic acids such as citric acid, oximes such as dimethylglyoxime, aminocarboxylates, polymers such as polyethyleneimines, ion exchange resins such as PUROLITE™ (available from Purolite International Ltd, Rhondda-Cynon-Taff, UK), integrity improving polymers such as OPADRY™ (available from Colourcon Ltd, Dartford, Kent, UK), -OH donators, heat absorbers such as silicone oil or plasticisers such as terephthalate.

20 Preferably, chelants are added to the molten dicarboxylic acid. Preferably the chelants are selected from phosphonate chelants, especially hydroxyethane diphosphonic acid. While not wishing to be bound by theory, it is believed that the chelants trap heavy metals which would otherwise be free to catalyse degradation and discolouration reactions.

Examples

The following examples further illustrate the preferred embodiments within the scope of the present invention. The examples are given solely for the purposes of illustration and are not to be construed as limitations of the present invention as many variations of the invention are possible without departing from its spirit or scope.

Example 1

35 9.5Kg of hexanedioic acid was mixed with 0.5Kg of PUROLITE™ in a container and then heated to a temperature of 165°C with mixing. Once the mixture was molten, water was added through an inlet pipe at a rate of 30g/min. This

molten mixture was pumped through a pipe to a shower head. The shower head was positioned over a conveyer belt carrying detergent tablets. The tablets are thus coated with a hexanedioic acid coating. The excess coating is blown off and the tablets are transported to the outside of the box.

5

Sample tablets were collected every 5 minutes for a 1 hour period and the level of discoloration, as measured by the Hunter-b value, was assessed. The discoloration was assessed using a Minolta Chroma Meter DP301 with a CR310 Lens. The Chroma Meter was calibrated against a white calibration plate and then the tip of measuring head was placed flat against the centre of the tablet surface. The results are shown in Figure 3.

10

Comparative Example 1

Detergent tablets were coated in the exactly the same way as in Example 1 except that no water was added to the molten mixture. Again, sample tablets were collected every 5 minutes for a 1 hour period and, using the above described method, the level of discoloration, as measured by the Hunter-b value, was assessed.

15

The results are shown in Figure 3. Since the temperature of the system is kept at around 165°C the water quickly evaporates. However, it can be seen that the addition of water to the system retards the rate of discolouration of the molten hexanedioic acid.

20

Example 2

9.6Kg of hexanedioic acid was mixed with 0.3Kg of PUROLITE™ in a container and then heated to a temperature of 165°C with mixing. Once the mixture was molten steam was added through an inlet pipe at a rate of 50g/min. Holes were spaced along the length of inlet pipe to allow the steam to escape into the molten mixture. This molten mixture was pumped through a pipe to a shower head. Said shower head was positioned over a conveyer belt carrying detergent tablets. The tablets are thus coated with a hexanedioic acid coating. The excess coating is blown off and the tablets are transported to the outside of the box.

30

35

Sample tablets were collected every 5 minutes for a 1 hour period and, using the above described method; the level of discoloration, as measured by the Hunter-b value, was assessed. The results are shown in Figure 4.

5 **Comparative Example 2**

Detergent tablets were coated in the exactly the same way as in Example 2 except that no steam was added to the molten mixture. Again, sample tablets were collected every 5 minutes for a 1 hour period and, using the above described method, the level of discoloration, as measured by the Hunter-b value, was assessed.

The results are shown in Figure 4. It can be seen that the addition of steam to the system retards the rate of discolouration of the molten hexanedioic acid.

	Example 3 (% by weight)	Example 4 (% by weight)	Example 5 (% by weight)
Hexanedioic Acid	95.000	97.000	98.000
Dodecanedioic acid	-	-	-
Water	0.002	0.005	0.003
HEDP ¹	0.01	0.01	0.01
Purolite ²	4.997	4.994	4.996

15 ¹hydroxyethane diphosphonic acid

²available from Purolite International Ltd, Rhondda-Cynon-Taff, UK

1. The first step in the process of the invention is to determine the scope of the invention. This is done by identifying the prior art and the novel features of the invention.

2. The next step is to conduct a search of the prior art. This is done by searching the patent literature and other sources of information.

THIS PAGE BLANK (USPTO)

3. The third step is to prepare a written description of the invention. This is done by drafting a patent application that includes a detailed description of the invention and its advantages.

4. The fourth step is to file the patent application with the United States Patent and Trademark Office (USPTO). This is done by submitting the application to the appropriate office.

5. The fifth step is to wait for the USPTO to examine the application. This is done by the USPTO's examination process, which includes a search and a substantive examination.

6. The sixth step is to receive a decision from the USPTO. This is done by the USPTO's decision-making process, which includes a final decision on whether to grant the patent.

7. The seventh step is to pay the required fees to the USPTO. This is done by the applicant or the applicant's attorney.

8. The eighth step is to receive the patent from the USPTO. This is done by the USPTO's issuance process, which includes the preparation and mailing of the patent document.

9. The ninth step is to enforce the patent. This is done by the patent owner or the patent owner's attorney, who may take legal action to enforce the patent.

Claims:

1. A process for treating dicarboxylic acids, said process comprising:
 - (a) heating said dicarboxylic acid to a temperature above its melting
5 point;
 - (b) adding water to said dicarboxylic acid.
2. A process according to Claim 1 wherein the dicarboxylic acid is selected
10 from C₂-C₁₃ dicarboxylic acids and mixtures thereof, preferably C₆-C₁₂
dicarboxylic acids and mixtures thereof, more preferably hexanedioic acid.
3. A process according to Claim 1 or 2 wherein the water is added within 10
minutes, more preferably within 5 minutes, even more preferably within 2
minutes, of the dicarboxylic acid becoming molten.
15
4. A process according to any of the preceding claims wherein water is added
in an amount of at least 1g, preferably at least 2.5g, more preferably at least
5g, per 1,000g of dicarboxylic acid.
- 20 5. A process according to any of the preceding claims wherein at least 1g,
preferably at least 2.5g, more preferably at least 5g, of water per 1,000g of
dicarboxylic acid is added per minute.
- 25 6. A process according to any of the preceding claims wherein the dicarboxylic
acid is heated to a temperature at least 5°C, preferably at least 10°C, above
its melting point.
7. Use of water to retard the discolouration of molten dicarboxylic acids.
- 30 8. A use according to Claim 7 wherein the dicarboxylic acid is selected from C₂-
C₁₃ dicarboxylic acids and mixtures thereof, preferably C₆-C₁₂ dicarboxylic
acids and mixtures thereof, more preferably hexanedioic acid.
- 35 9. A composition comprising molten dicarboxylic acid and water characterised
in that said composition comprises at least 1g, preferably at least 2.5g, more
preferably at least 5g, of water per 1,000g of dicarboxylic acid.

10. A composition according to Claim 9 wherein the dicarboxylic acid is selected from C_2 - C_{13} dicarboxylic acids and mixtures thereof, preferably C_6 - C_{12} dicarboxylic acids and mixtures thereof, more preferably hexanedioic acid.
- 5 11. A composition according to Claim 8 or 9, wherein the composition additionally comprises a chelant.
12. A process for coating detergent tablets with a dicarboxylic acid, wherein said dicarboxylic acid is retarding from discolouring, said process comprising:
- 10 (a) heating a dicarboxylic acid to a temperature above its melting point; (b) adding water to said dicarboxylic acid; and (c) applying the dicarboxylic acid to the tablet.

Abstract

According to the present invention there is provided a process for retarding the discolouration of dicarboxylic acids, said process comprising:

5

(a) heating said dicarboxylic acid to a temperature above its melting point;

(b) adding water to said dicarboxylic acid.

10

A further aspect of the present invention provides a composition for retarding the discolouration of dicarboxylic acids, said composition comprising 1g, preferably 2.5g, more preferably 5g, of water per 1,000g of dicarboxylic acid. A

15

further aspect of the present invention provides for the use of water to retard the discolouration of dicarboxylic acids, particularly molten dicarboxylic acids.

THIS PAGE BLANK (USPTO)

12

Figur 1

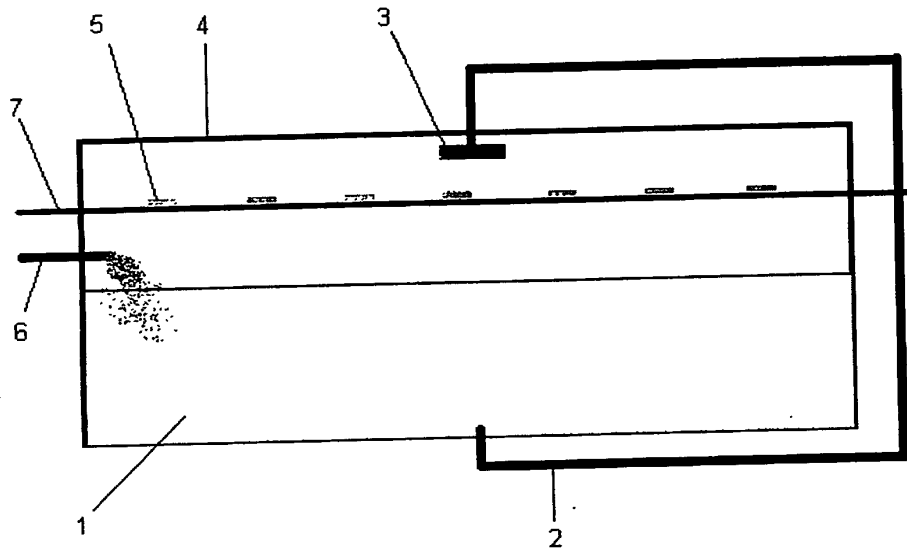


Figure 2

5


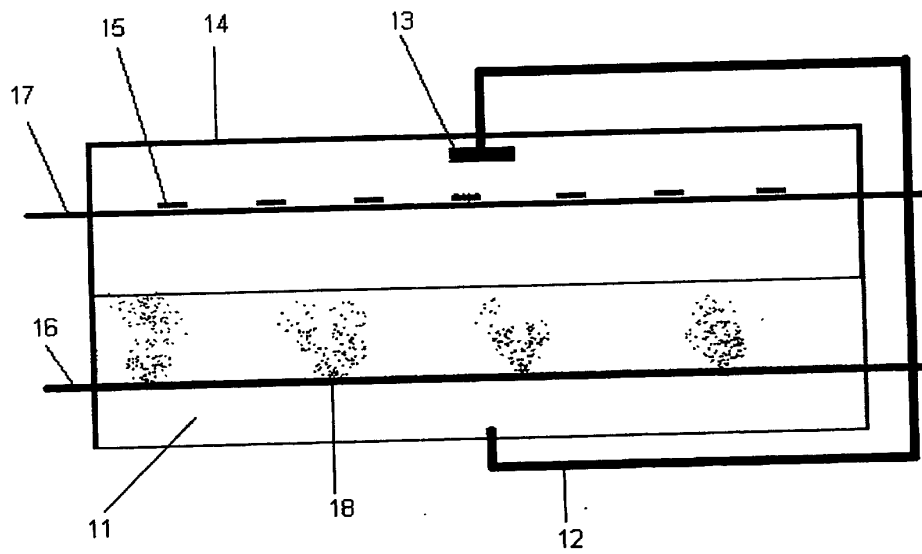


Figure 3

Coated Detergent Tablet Hunter b-value over time With & Without water addition to the coating

**Figure 4**

Coated Detergent Tablet Hunter b-value over time With & Without steam addition to the coating

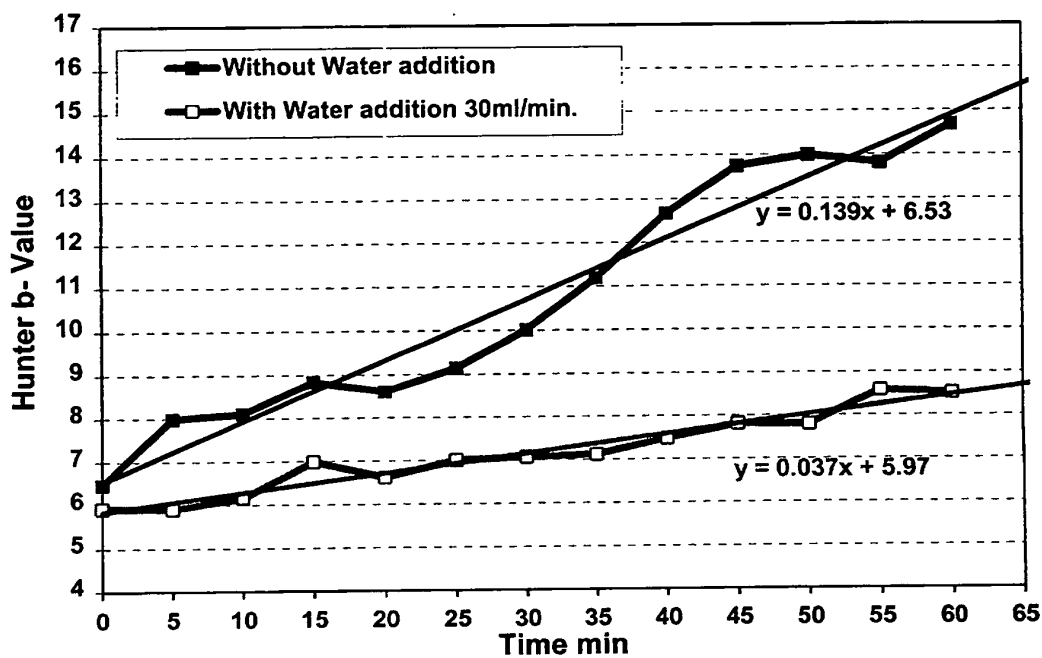